



CLEAN WATER



# External Battery Pack

*For HWM Telemetry Data Loggers*



## Key Features

- ✓ Compact
- ✓ Easy to install in the field via simple 4 way mil-spec connector
- ✓ IP68
- ✓ Maintains typical five year battery life even during demanding call in regimes
- ✓ Flexibility, packs connect to increase capacity


## Overview

HWM introduces its new high capacity compact battery pack, designed for flexibility and ease of installation

HWM' data loggers are designed to perform maintenance free for up to five years before battery replacement. To maintain this during demanding call-in regimes, the logger's internal battery may be supplemented with a low cost external battery pack.

External Battery Packs can be easily installed and replaced with minimal operational cost an integral cable or via a direct mil-spec connector and separate cable. This enables the typical five year battery life to be maintained when transmitting at faster dial-in regimes for example, data every hour, 30 minutes or 15 minutes. All other logger components are designed to achieve the five year life without intervention.

These now replace our EXTBATTBOX15/30/60 range and are constructed in PC ABS.

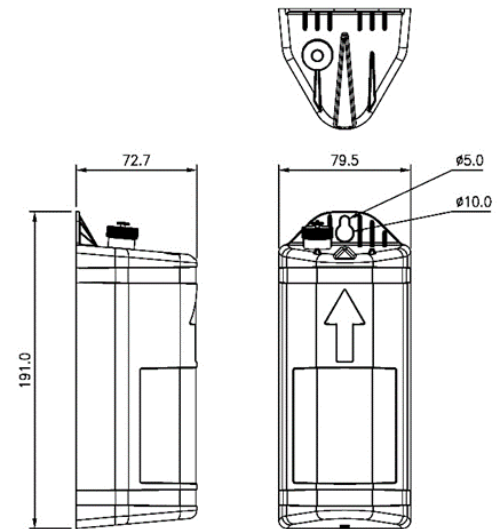

Description	Part Numbers	
<b>EBT 1</b> - Including connecting cable (integral)	<b>LX</b> EBT1LX	<b>Multilog</b> EBT1ML
<b>EBT 1</b> - Including mil spec connector for replacement, logger already has cable	<b>LX, Multilog, Other</b> EBT1CX	
<b>EBT 2</b> - Including connecting cable (integral)	<b>LX</b> EBT2LX	<b>Multilog</b> EBT2ML
<b>EBT 2</b> - Including mil spec connector for replacement, logger already has cable	<b>LX, Multilog, Other</b> EBT2CX	

EBT1 – 30 mins (or higher) 5 years+ \*

EBT2 – 15 mins (or higher) 5 years+ \*

\*Typical usage and assuming

- Correct battery orientation
- Good signals/reliable network connection.
- Responsive server.
- Firmware version V4.00 or above



