



Ref: FAQ0189


Version: 1.0

Title -Radcom loggers- Depth transducer

Made By: AB 17/09/15

(Issue 2)

Radcom loggers - Depth Transducer with Vent Box Installation Guide

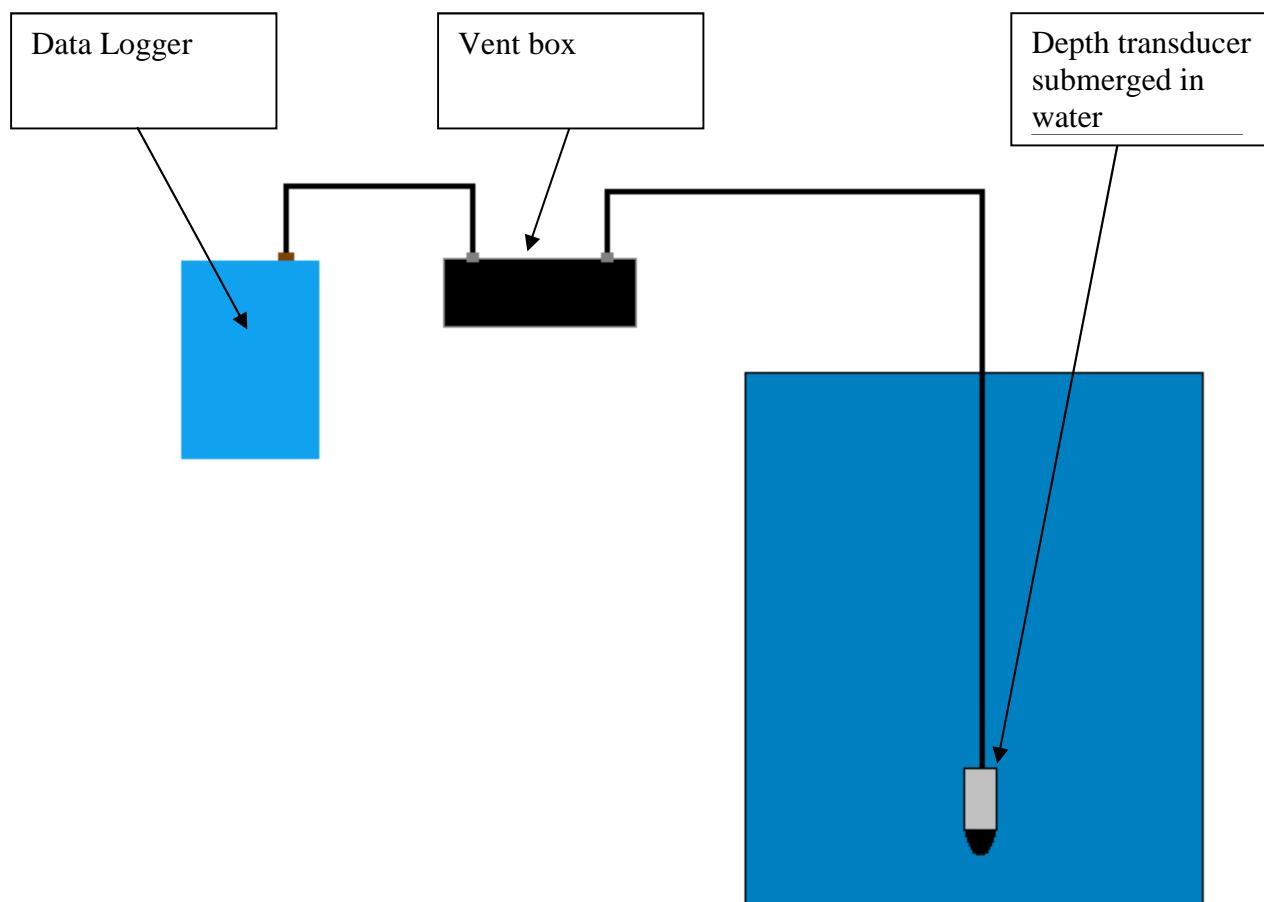

The vent box must be out of the water, protected from rain and exposed to normal atmospheric pressure.

The depth transducer should be submerged in the water as required.

Software Configuration

The standard pressure channel calibrated range of Radcom loggers is 0-1020 units.

For a 10 bar pressure transducer 10 bar = 1020 on the logger

Document History:

Edition	Date of Issue	Modification	Notes
1st		Release	
2nd	17/09/15	Format update	