




1. Setup the Bluetooth connection between the PC/Tablet and the Patroller;
(Based on a WIN7 PC) – Insert the Bluetooth Dongle (if required) in an available USB port, wait for the drivers to be installed, then look at “Devices and Printers”, Right Click on the Icon and select “Bluetooth Settings”

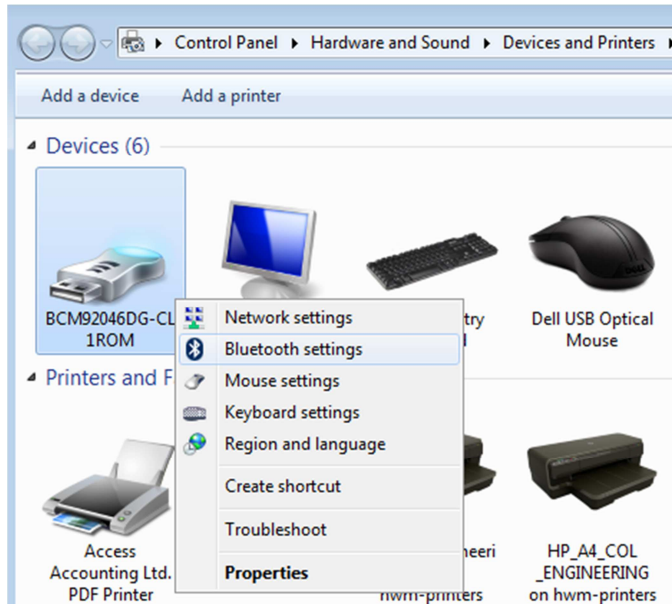



2. Allow the PC/Tablet to discover Bluetooth Devices and Click ‘OK’

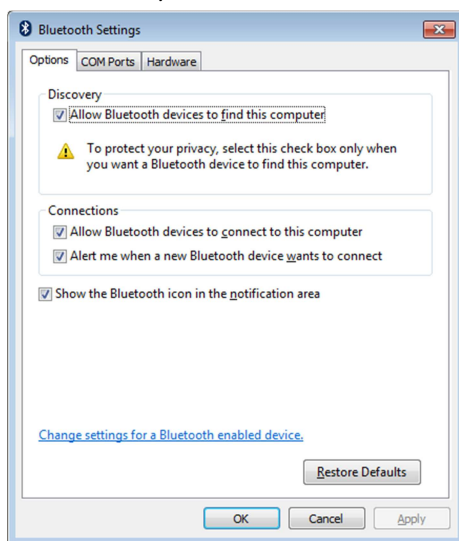


3. Turn On the Patroller and “Add” the device to your PC/Tablet

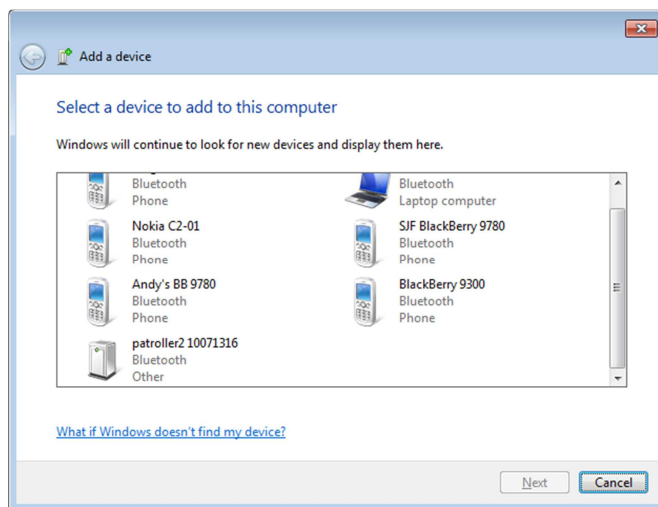


4. Enter the Patrollers Pairing code '0000'

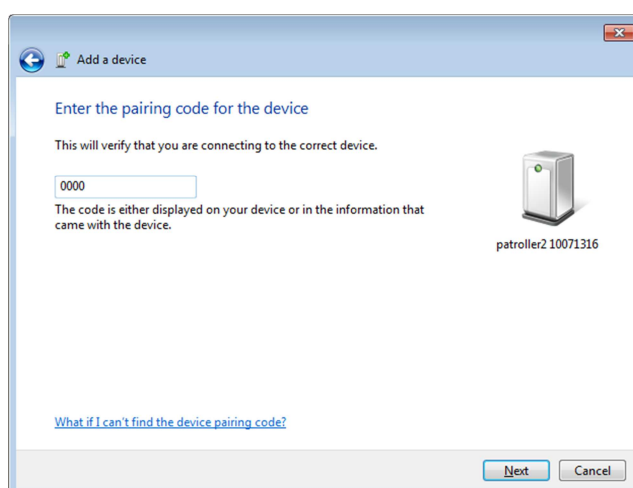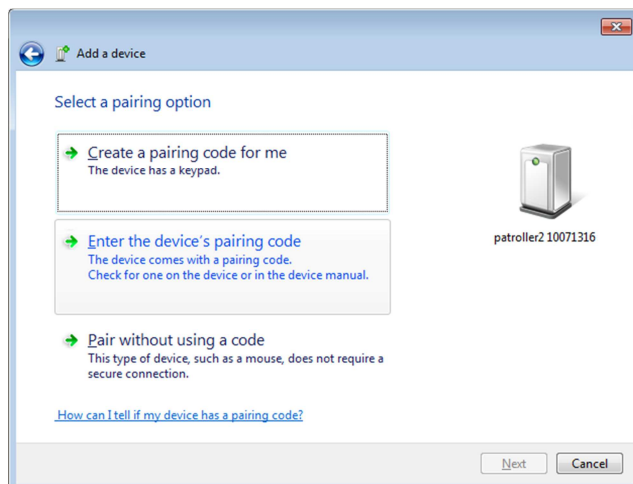

5. The Patroller will now appear in your 'Devices' – Confirm the Comm port it is using (Port 25 in this example)

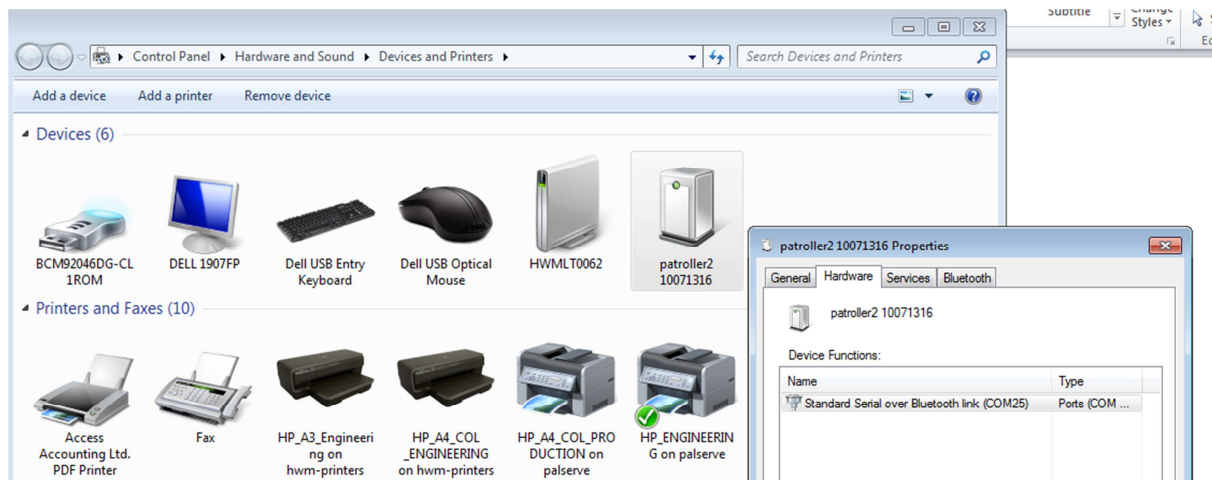

6. Now that the Patroller is paired with the PC, you can install and launch the PC Patroller (v2-10) Application.

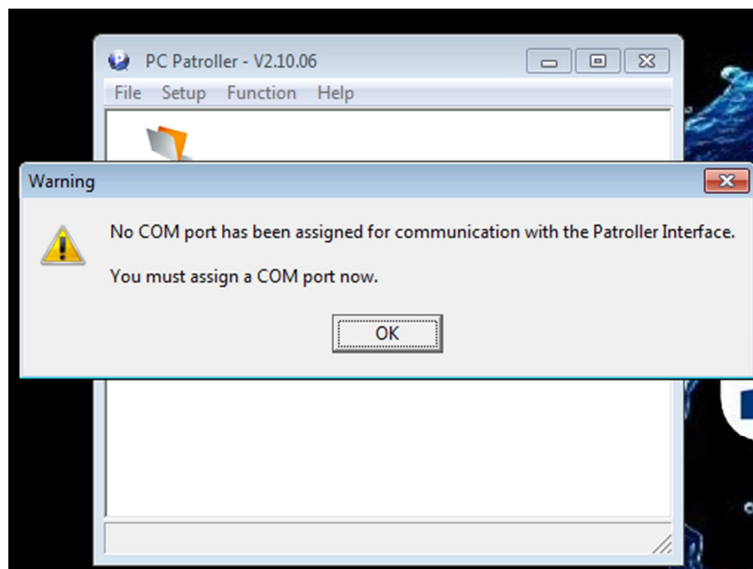


7. You will be prompted to select the COM port for the Bluetooth connection to the Patroller. Select the port assigned in step '5' and click 'Test Patroller'
- NB: The other options (GPS/GSM) depend on your tablets specification or additional dongles etc (Refer to the attached manual for further details)

The 'Connections' dialog box is shown with three main sections: 'Patroller Interface', 'GPS Module', and 'GSM Modem'. The 'Patroller Interface' section has a dropdown menu set to 'COM25' and a 'Test Patroller' button. The 'GPS Module' section has an 'Enable GPS' checkbox, a dropdown menu, and a 'Test GPS' button. The 'GSM Modem' section has an 'Enable GSM Modem' checkbox, a dropdown menu, and 'Auto-Detect' and 'Test Modem' buttons. At the bottom right are 'OK' and 'Cancel' buttons.

8. Once tested, the Patrollers S/N will be displayed in the bottom left of the screen

This screenshot shows the same 'Connections' dialog box as above, but with a status bar at the bottom that reads 'Connected to Patroller patroller2 10071316'. The 'Test Patroller' button is now highlighted with a dashed border, indicating it has been clicked.

9. In the PC Patroller screen, you will only see the 'About' option. You will need to 'allow' the configuration screens to be displayed: Setup -> Options -> Password 'admin'
Select the options you wish the User to see;

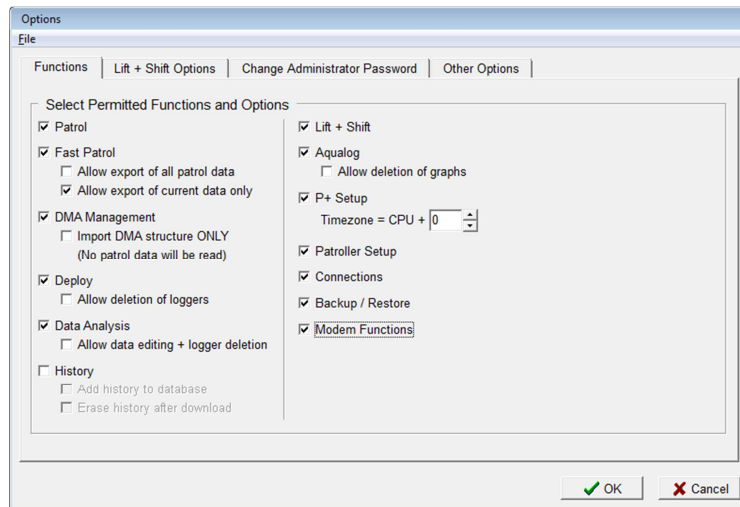

Click 'OK, and the Full option screen will be displayed

